


BASO 1.5 LOUVER

DIRECT / INDIRECT



CERTIFICATIONS & COMPLIANCE

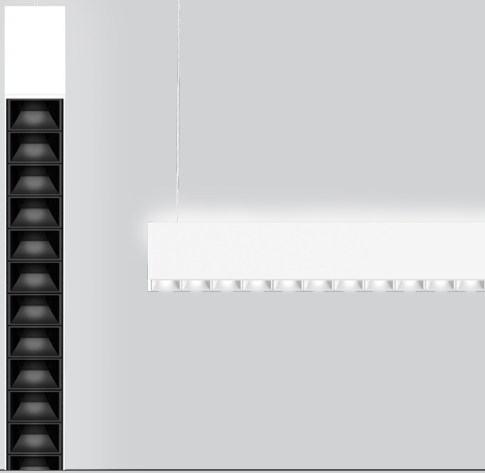


FEATURES




PERFORMANCE

- Up to 118lm/W efficiency
- 400 / 600 / 800lm/ft
- CRI > 80 & CRI > 90
- IC & Damp rated
- UGR < 17




MOUNTING

Pendant



MULTIPLE LENS COMBINATIONS

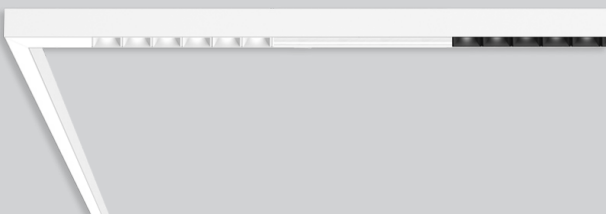

Contact customer service with a drawing of your request.

Catalog Number Example

BASO 1.5-SUR-BL-LBM-BW-30K-C80-UNV-010V-0400LF-0400LF-NLC-ST-24IN

A B C D E F G H I K L M N O

A RANGE

BASO 1.5 B A S O 1 . 5

B MOUNTING

Pendant P D T
 Pendant in-line ACT T-BAR P A T
 Pendant in-line ACT SLOT P A S
 Pendant ACT center tile P A C

pendant suspension set includes cable suspension and one white power feeder with a white junction box cover

for black power feeds or junction box covers, please contact customer service

C COLOR

White W H
 Black B L
 Gray G R
 Custom color RAL X X

trimless version available in white only

D LENS

Louver black matte L B M
 Louver black gloss L B G
 Louver white matte L W M
 Louver white gloss L W G
 Louver chrome L C H

E LENS INDIRECT

Batwing indirect B W

F CCT

2700K 2 7 K
 3000K 3 0 K
 3500K 3 5 K
 4000K 4 0 K
 Custom CCT X X K

G CRI

CRI > 80 C 8 0
 CRI > 90 C 9 0

H VOLTAGE

120V / 277V U N V

I DIMMING

0-10V 1% 0 1 0 V
 Lutron EcoSystem L E S 1
 Quantum, Vive, GRAFIK Eye,
 HomeWorks
 Power over ethernet P O E C
 consult customer service for compatibility
 Custom dimming X X X X
 consult customer service for compatibility

J SENSOR (optional)

Integrated Sensor S E N
 consult customer service for sensor request

K OUTPUT LM/FT DOWN

400 lm/ft ↓ 0 4 0 0 L F
 600 lm/ft ↓ 0 6 0 0 L F
 800 lm/ft ↓ 0 8 0 0 L F
 Custom lm/ft X X X X L F
 custom lumen up to 800 lm/ft

L OUTPUT LM/FT UP

400 lm/ft ↑ 0 4 0 0 L F
 600 lm/ft ↑ 0 6 0 0 L F
 800 lm/ft ↑ 0 8 0 0 L F
 Custom lm/ft X X X X L F
 custom lumen up to 1000 lm/ft

M CIRCUIT / EM

Single circuit *
 EMC night light circuit N L C
 Dual Circuit D C
 * leave blank

N SHAPE / PATTERN

Linear / straight S T

O DIMENSIONS IN INCH

Linear 2' 2 4 I N
 Linear 4' 4 8 I N
 Linear 6' 7 2 I N
 Linear 8' 9 6 I N
 Linear custom # # # I N

custom combinations including opal lens available, please contact customer service with a drawing of your request

P CERTIFICATION (optional)

Red List Approved R L A

Technical data

BASO 1.5 DIRECT

Delivered Lumens	CCT	CRI	Input Watts	Luminaire Efficacy
400 lm/ft ↓	4000K	CRI > 80	3.9 W/ft	103 lm/W
600 lm/ft ↓	4000K	CRI > 80	5.9 W/ft	102 lm/W
800 lm/ft ↓	4000K	CRI > 80	8.2 W/ft	98 lm/W

LUMEN OUTPUT MULTIPLIER*

Color Temperature	CRI	
	80+	90+
4000K	1	0.86
3500K	0.96	0.84
3000K	0.95	0.82
2700K	0.91	0.78

BASO UPLIGHT

Delivered Lumens	CCT	CRI	Input Watts	Luminaire Efficacy
400 lm/ft ↑	4000K	CRI > 80	3.5 W/ft	114 lm/W
500 lm/ft ↑	4000K	CRI > 80	4.3 W/ft	116 lm/W
600 lm/ft ↑	4000K	CRI > 80	5.2 W/ft	115 lm/W
750 lm/ft ↑	4000K	CRI > 80	6.9 W/ft	109 lm/W
800 lm/ft ↑	4000K	CRI > 80	6.9 W/ft	108 lm/W
1000 lm/ft ↑	4000K	CRI > 80	9.4 W/ft	106 lm/W

Patterns top view

LINEAR

A	FIXTURES	CODE
48"	1 × 4' linear	ST - 0 4 FT
96"	1 × 8' linear	ST - 0 8 FT
144"	3 × 4' linear	ST - 1 2 FT

