


# BASO 1.5 LOUVER

## DIRECT / INDIRECT



### CERTIFICATIONS & COMPLIANCE

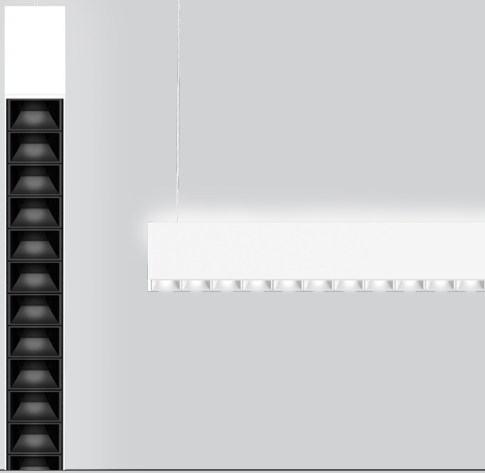


### FEATURES




### PERFORMANCE

- Up to 118lm/W efficiency
- 400 / 600 / 800lm/ft
- CRI > 80 & CRI > 90
- IC & Damp rated
- UGR < 17




### MOUNTING

Pendant



### MULTIPLE LENS COMBINATIONS

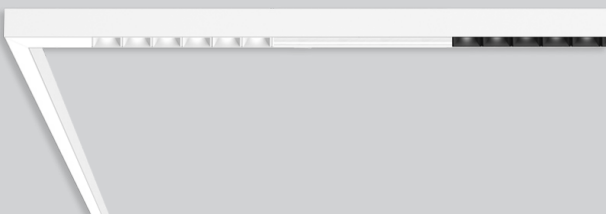

Contact customer service with a drawing of your request.

### Catalog Number Example

BASO 1.5-SUR-BL-LBM-BW-30K-C80-UNV-010V-0400LF-0400LF-NLC-ST-24IN

A B C D E F G H I K L M N O

### A RANGE

BASO 1.5                      B A S O 1 . 5

### B MOUNTING

Pendant                                      P D T  
 Pendant in-line ACT T-BAR      P A T  
 Pendant in-line ACT SLOT      P A S  
 Pendant ACT center tile      P A C

pendant suspension set includes cable suspension and one white power feeder with a white junction box cover

for black power feeds or junction box covers, please contact customer service

### C COLOR

White    W H  
 Black    B L  
 Gray    G R  
 Custom color RAL                      X X

trimless version available in white only

### D LENS

Louver black matte                      L B M  
 Louver black gloss                      L B G  
 Louver white matte                      L W M  
 Louver white gloss                      L W G  
 Louver chrome                              L C H

### E LENS INDIRECT

Batwing indirect                      B W

### F CCT

3000K    3 0 K  
 3500K    3 5 K  
 4000K    4 0 K  
 Custom CCT                              X X K

### G CRI

CRI > 80    C 8 0  
 CRI > 90    C 9 0

### H VOLTAGE

120V / 277V                              U N V

### I DIMMING

0-10V 1%    0 1 0 V  
 Lutron EcoSystem                      L E S 1  
 Quantum, Vive, GRAFIK Eye,  
 HomeWorks

Power over ethernet                      P O E C

consult customer service for compatibility

Custom dimming                      X X X X

consult customer service for compatibility

### J SENSOR (optional)

Integrated Sensor                      S E N  
 consult customer service for sensor request

### K OUTPUT LM/FT DOWN

400 lm/ft ↓                                      0 4 0 0 L F  
 600 lm/ft ↓                                      0 6 0 0 L F  
 800 lm/ft ↓                                      0 8 0 0 L F  
 Custom lm/ft                              X X X X L F  
 custom lumen up to 800 lm/ft

### L OUTPUT LM/FT UP

400 lm/ft ↑                                      0 4 0 0 L F  
 600 lm/ft ↑                                      0 6 0 0 L F  
 800 lm/ft ↑                                      0 8 0 0 L F  
 Custom lm/ft                              X X X X L F  
 custom lumen up to 1000 lm/ft

### M CIRCUIT / EM

Single circuit                                      \*  
 EMC night light circuit                      N L C  
 Dual Circuit                                      D C  
 \* leave blank

### N SHAPE / PATTERN

Linear / straight                      S T

### O DIMENSIONS IN INCH

Linear 2'    2 4 I N  
 Linear 4'    4 8 I N  
 Linear 6'    7 2 I N  
 Linear 8'    9 6 I N  
 Linear custom                              # # # I N

custom combinations including opal lens available, please contact customer service with a drawing of your request

### P CERTIFICATION (optional)

Red List Approved                      R L A

**Technical data**

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
<b>BASO 1.5 LOUVER DIRECT</b>								
e LED	4' linear	30K, 35K, 40K	16.4W	1600lm	100% down	400lm/ft	67%	118lm/W
	8' linear		32.8W	3200lm				
e <sup>2</sup> LED	4' linear	30K, 35K, 40K	25.6W	2400lm	100% down	600lm/ft	67%	113lm/W
	8' linear		51.2W	4800lm				
e <sup>2+</sup> LED	4' linear	30K, 35K, 40K	35W	3200lm	100% down	800lm/ft	67%	108lm/W
	8' linear		70W	6400lm				
		LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
<b>BASO 1.5 LOUVER INDIRECT</b>								
e LED	4' linear	30K, 35K, 40K	9W	1000lm	100% up	250lm/ft	72%	111lm/W
	8' linear		18W	2000lm				
e <sup>2+</sup> LED	4' linear	30K, 35K, 40K	14W	1400lm	100% up	350lm/ft	72%	100lm/W
	8' linear		28W	2800lm				

**Patterns** top view

**LINEAR**

A	FIXTURES	CODE
48"	1 × 4' linear	ST - 0 4 FT
96"	1 × 8' linear	ST - 0 8 FT
144"	3 × 4' linear	ST - 1 2 FT

