


# BASO 2.5 WALL WASH



## CERTIFICATIONS & COMPLIANCE

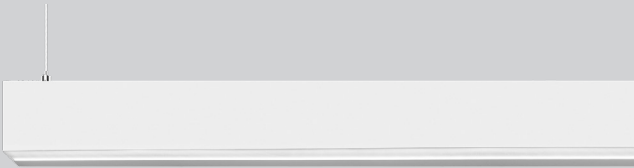


## FEATURES




## PERFORMANCE

- Up to 125lm/W efficiency
- 400 / 600 / 800lm/ft
- CRI > 80 & CRI > 90
- IC rated & damp rated



## MOUNTING

Surface



Pendant



## PATTERNS




Rectangular

For customization, please contact customer service

## BEAM DISTRIBUTION

### Wall to ceiling ratio

Room height	H = 9 ft
Distance to wall	A = 3 ft
Reflection factor	0.7   0.5   0.2
Maintenance factor	0.8
Eye level	4 - 5 ft

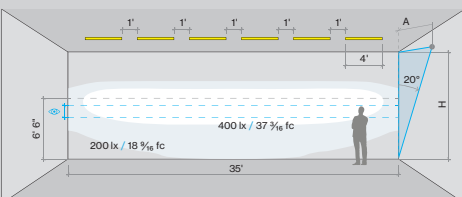

## Catalog Number Example

BASO 2.5-PDT-BL-WW-30K-C80-UNV-010V-0500LF-NLC-ST-24IN

A B C D E F G H J K L M

## A RANGE

BASO 2.5      BASO2.5

## B MOUNTING

**QS** Surface      SUR

**QS** Pendant      PDT

pendant suspension set includes cable suspension and one white power feeder with a white junction box cover

for black power feeds or junction box covers, please contact customer service

## C COLOR

**QS** White      WH

Black      BL

Gray      GR

Custom color RAL      XX

trimless version available in white only

## D LENS

Asymmetric wall washer      WW

## E CCT

2700K      27K

**QS** 3000K      30K

**QS** 3500K      35K

4000K      40K

## F CRI

CRI > 80      C80

CRI > 90      C90

## G VOLTAGE

120V / 277V      UNV

## H DIMMING

**QS** 0-10V 1%      010V

Lutron EcoSystem      LES1

Quantum, Vive, GRAFIK Eye, HomeWorks

Power over ethernet      POEC

consult customer service for compatibility

Custom dimming      XXXX

consult customer service for compatibility

## I SENSOR (optional)

Integrated Sensor      SEN

consult customer service for sensor request

## J OUTPUT LM/FT

**QS** 500lm/ft 100% ↓      0500LF

**QS** 750lm/ft 100% ↓      0750LF

**QS** 1000lm/ft 100% ↓      1000LF

Custom lm/ft      XXXXLF

custom lumen up to 1200 lm/ft

## K CIRCUIT / EM

**QS** Single circuit      \*

EMC night light circuit      NLC

EMB available in 4ft and 8ft      EM#

\* leave blank

## L SHAPE / PATTERN

**QS** Linear / straight      ST

L-Shape inner      LI

L-Shape outer      LO

□-Shape inner      RI

□-Shape outer      RO

U-Shape inner      UI

U-Shape outer      UO

Custom shape      XX

please contact customer service for availability

## M DIMENSIONS IN INCH

Linear 2'      24IN

**QS** Linear 4'      48IN

**QS** Linear 6'      72IN

**QS** Linear 8'      96IN

Linear custom      ###IN

L-Shape      ###X###IN

U-Shape      ###X###X###IN

□-Shape      ###X###IN

## N CERTIFICATION (optional)


Red List Approved      RLA

Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
<b>BASO DIRECT</b>									
e LED	4' linear	40K	12.8W	1600lm	100% down	400lm/ft	-	75%	125lm/W
	8' linear		25.6W	3200lm					
e <sup>2</sup> LED	4' linear	40K	20.4W	2400lm	100% down	600lm/ft	-	75%	117lm/W
	8' linear		40.8W	4800lm					
e <sup>2+</sup> LED	4' linear	40K	28W	3200lm	100% down	800lm/ft	-	75%	114lm/W
	8' linear		5+W	6400lm					


Patterns top view

LINEAR




A	FIXTURES	CODE
48"	1 x 4' linear	0 4 FT
96"	1 x 8' linear	0 8 FT
144"	3 x 4' linear	1 2 FT

L-SHAPE INNER



A / B	FIXTURES	CODE
48" / 48"	2 x 2' linear + 1 x 2' x 2' corner	0 4 X 0 4 FT
48" / 96"	1 x 2' linear + 1 x 6' linear + 1 x 2' x 2' corner	0 4 X 0 8 FT
96" / 96"	2 x 6' linear + 1 x 2' x 2' corner	0 8 X 0 8 FT

L-SHAPE OUTER





A / B	FIXTURES	CODE
48" / 48"	2 x 2' linear + 1 x 2' x 2' corner	0 4 X 0 4 FT
48" / 96"	1 x 2' linear + 1 x 6' linear + 1 x 2' x 2' corner	0 4 X 0 8 FT
96" / 96"	2 x 6' linear + 1 x 2' x 2' corner	0 8 X 0 8 FT

LIGHT DIRECTION DIAGRAM





Dimensions

SURFACE direct

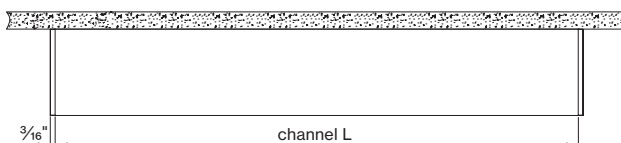

PENDANT direct

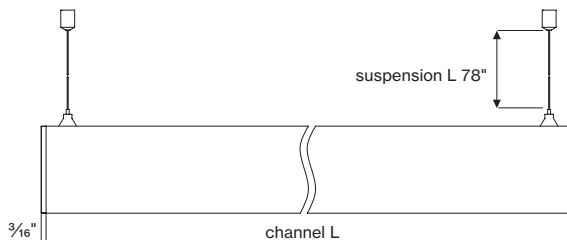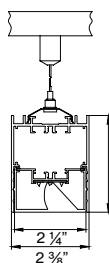

BASO mounting instructions

Get access to the BASO 2.5 WW mounting instructions faster by scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/baso>

