


BASO 2.5 WALL WASH



CERTIFICATIONS & COMPLIANCE

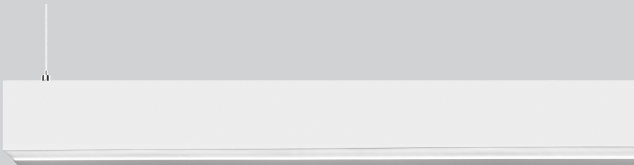


FEATURES




PERFORMANCE

- Up to 125lm/W efficiency
- 400 / 600 / 800lm/ft
- CRI > 80 & CRI > 90
- IC rated & damp rated



MOUNTING

Surface



Pendant



PATTERNS




Rectangular

For customization, please contact customer service

BEAM DISTRIBUTION

Wall to ceiling ratio

Room height	H = 9 ft
Distance to wall	A = 3 ft
Reflection factor	0.7 0.5 0.2
Maintenance factor	0.8
Eye level	4 - 5 ft

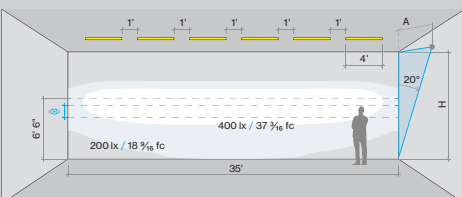

Catalog Number Example

BASO 2.5-PDT-BL-WW-30K-C80-UNV-010V-0500LF-NLC-ST-24IN

A B C D E F G H J K L M

A RANGE

BASO 2.5 BASO2.5

B MOUNTING

QS Surface SUR

QS Pendant PDT

pendant suspension set includes cable suspension and one white power feeder with a white junction box cover

for black power feeds or junction box covers, please contact customer service

C COLOR

QS White WH

Black BL

Gray GR

Custom color RAL XX

trimless version available in white only

D LENS

Asymmetric wall washer WW

E CCT

2700K 27K

QS 3000K 30K

QS 3500K 35K

4000K 40K

F CRI

CRI > 80 C80

CRI > 90 C90

G VOLTAGE

120V / 277V UNV

H DIMMING

QS 0-10V 1% 010V

Lutron EcoSystem LES1

Quantum, Vive, GRAFIK Eye, HomeWorks

Power over ethernet POEC

consult customer service for compatibility

Custom dimming XXXX

consult customer service for compatibility

I SENSOR (optional)

Integrated Sensor SEN

consult customer service for sensor request

J OUTPUT LM/FT

QS 500lm/ft 100% ↓ 0500LF

QS 750lm/ft 100% ↓ 0750LF

QS 1000lm/ft 100% ↓ 1000LF

Custom lm/ft XXXXLF

custom lumen up to 1200 lm/ft

K CIRCUIT / EM

QS Single circuit *

EMC night light circuit NLC

EMB available in 4ft and 8ft EM#

* leave blank

L SHAPE / PATTERN

QS Linear / straight ST

L-Shape inner LI

L-Shape outer LO

□-Shape inner RI

□-Shape outer RO

U-Shape inner UI

U-Shape outer UO

Custom shape XX

please contact customer service for availability

M DIMENSIONS IN INCH

Linear 2' 24IN

QS Linear 4' 48IN

QS Linear 6' 72IN

QS Linear 8' 96IN

Linear custom ###IN

L-Shape ###X###IN

U-Shape ###X###X###IN

□-Shape ###X###IN

N CERTIFICATION (optional)


Red List Approved RLA

Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
BASO DIRECT									
e LED	4' linear	40K	12.8W	1600lm	100% down	400lm/ft	-	75%	125lm/W
	8' linear		25.6W	3200lm					
e ² LED	4' linear	40K	20.4W	2400lm	100% down	600lm/ft	-	75%	117lm/W
	8' linear		40.8W	4800lm					
e ²⁺ LED	4' linear	40K	28W	3200lm	100% down	800lm/ft	-	75%	114lm/W
	8' linear		5+W	6400lm					


Patterns top view

LINEAR




A	FIXTURES	CODE
48"	1 x 4' linear	0 4 FT
96"	1 x 8' linear	0 8 FT
144"	3 x 4' linear	1 2 FT

L-SHAPE INNER



A / B	FIXTURES	CODE
48" / 48"	2 x 2' linear + 1 x 2' x 2' corner	0 4 X 0 4 FT
48" / 96"	1 x 2' linear + 1 x 6' linear + 1 x 2' x 2' corner	0 4 X 0 8 FT
96" / 96"	2 x 6' linear + 1 x 2' x 2' corner	0 8 X 0 8 FT

L-SHAPE OUTER





A / B	FIXTURES	CODE
48" / 48"	2 x 2' linear + 1 x 2' x 2' corner	0 4 X 0 4 FT
48" / 96"	1 x 2' linear + 1 x 6' linear + 1 x 2' x 2' corner	0 4 X 0 8 FT
96" / 96"	2 x 6' linear + 1 x 2' x 2' corner	0 8 X 0 8 FT

LIGHT DIRECTION DIAGRAM





Dimensions

SURFACE direct

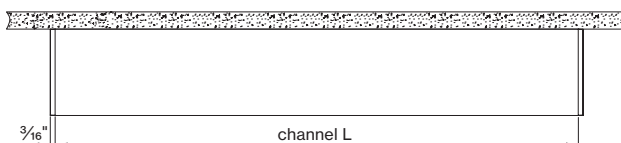

PENDANT direct

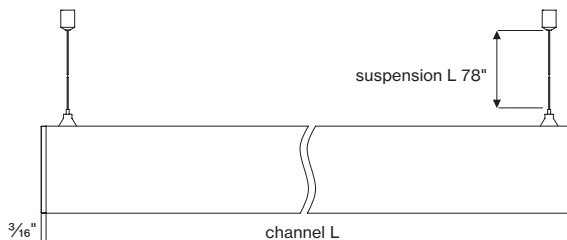

BASO mounting instructions

Get access to the BASO 2.5 WW mounting instructions faster by scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/baso>

