


DOT R DIRECT




PERFORMANCE

- Up to 90lm/W
- CRI > 90
- 900lm/9W output
- Remote Power Supply




MOUNTING

Surface



Pendant



5 YEAR
limited
led warranty

Catalog Number Example

DOTR-SUR-WH-1L-27K-C90-NOACC-SP-R19D-UNV-010V-1500LM-FTCA

A RANGE

DOT-R _____ DOT R

H ACCESSORIES

No Accessory _____ NO ACC
Honeycomb Louver _____ H COMB

B MOUNTING

Surface _____ SUR
Pendant _____ PDT

I VOLTAGE

120V / 277V _____ UNV

C COLOR

White _____ WH
Black _____ BL

J DIMMING

0-10V 1% _____ 0 1 0 V
Hi-lume 1% EcoSystem _____ L D E 1

D COLOR (HARDWARE)

White _____ WH
Black _____ BL

K OUTPUT PER LAMP

1000lm 11W 1 0 0 0 LM - 11W
1500lm 16W 1 5 0 0 LM - 16W
1900lm 20W 1 9 0 0 LM - 20W

E CCT

2700 K _____ 2 7 K
3000 K _____ 3 0 K
3500 K _____ 3 5 K
4000 K _____ 4 0 K

L CANOPY TYPE

Flat canopy _____ F T C A

F CRI

CRI > 80 _____ C 8 0
CRI > 90 _____ C 9 0

G REFLECTOR




Spot 19° _____ SP - R 1 9 D
Medium 26° _____ MD - R 2 6 D
Flood 37° _____ FL - R 3 7 D
Wide flood 62° _____ WI - R 6 2 D

BASO
basolighting.com
xalusa.com

PRODUCT DETAILS

Dimensions

Surface

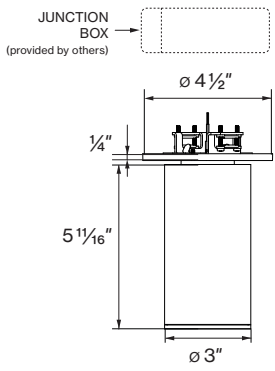

Pendant

