


HEX

DIRECT/INDIRECT



CERTIFICATIONS & COMPLIANCE

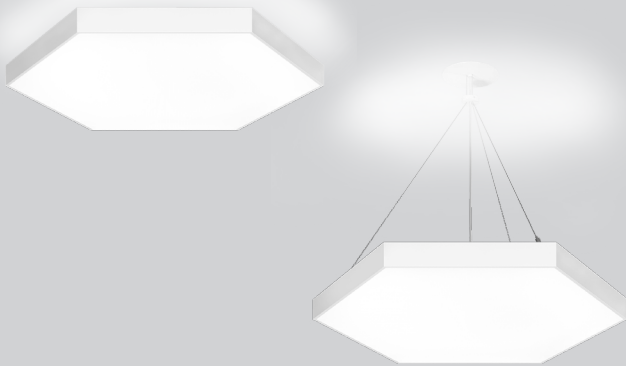

FEATURES


5 YEAR
limited
led warranty

POE
Power over Ethernet



PERFORMANCE

- Up to 125 lm/W efficiency
- 27 K, 30 K, 35 K, 40 K
- CRI > 80 & CRI > 90




MOUNTING

Surface




Pendant



ONE CLICK INSTALLATION

Mounting & electrical connection with one click

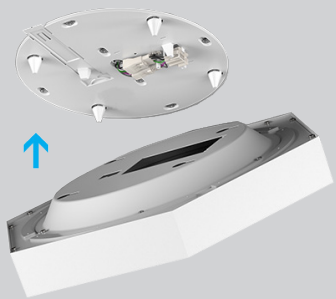

Catalog Number Example

HEX-D/I-SUR-BL-OP-35K-C90-UNV-010V-02900L-DM-2FT

A B C D E F G H I J K

A RANGE

HEX _____ HEX - D / I

B MOUNTING

Surface _____ SUR
Pendant _____ P D T

pendant suspension set includes cable suspension and one white power feeder with a white junction box cover

C COLOR

White _____ WH
Black _____ BL
Gray _____ GR
Custom color RAL _____ XX

D LENS

Opal cover _____ OP

E CCT

3000 K _____ 3 0 K
3500 K _____ 3 5 K
4000 K _____ 4 0 K

F CRI

CRI > 80 _____ C 8 0
CRI > 90 _____ C 9 0

G VOLTAGE

120V/277V _____ UNV
347 V _____ 3 4 7
only 0-10 V dim

H DIMMING

0-10V 1% _____ 0 1 0 V
Lutron EcoSystem _____ L D E 1
Quantum, Vive, GRAFIK Eye,
HomeWorks

I OUTPUT LM

○ 1 1/2'	2900lm	0 2 9 0 0 L
	4100lm	0 4 1 0 0 L
○ 2'	4000lm	0 4 0 0 0 L
	5400lm	0 5 4 0 0 L
	6500lm*	0 6 5 0 0 L
○ 3'	6800lm	0 6 8 0 0 L
	7800lm	0 7 8 0 0 L
	10100lm	1 0 1 0 0 L
	13800lm	1 3 8 0 0 L

*only 0-10V and DALI dimming available; not compatible with EMP

J CIRCUIT / EM

Single circuit _____ *

* leave blank

Dual circuit _____ DC

EMP EM battery pack _____ EMB

EM battery pack only for 120 / 277V option. Lutron only available for DM 3' ≤ 10000lm. No Lutron EM available for DM 1' or DM 2'

K DIAMETER IN FT

○ 1 1/2'	DM - 1 . 5 F T
○ 2'	DM - 2 F T
○ 3'	DM - 3 F T

Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LM DIRECT	DELIVERED LM INDIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
	○ 1 1/2' gray	27K, 30K, 35K, 40K	28 W	2870lm	73% down / 27% up	2090lm	780lm	86 %	102lm/W
		27K, 30K, 35K, 40K	47 W	4070lm	73% down / 27% up	2990lm	1090lm		87lm/W
		27K, 30K, 35K, 40K	4240lm	3110lm	1130lm	91lm/W			
	○ 2' gray	27K, 30K, 35K, 40K	35 W	4020lm	76% down / 24% up	3060lm	960lm	86 %	114lm/W
		27K, 30K, 35K, 40K	50 W	4180lm	76% down / 24% up	3180lm	1000lm		118lm/W
		27K, 30K, 35K, 40K	64 W	5400lm	80% down / 20% up	4090lm	1310lm		107lm/W
		27K, 30K, 35K, 40K	67 W	6450lm	80% down / 20% up	4250lm	1360lm		111lm/W
		27K, 30K, 35K, 40K	6710lm	5320lm	1380lm	104lm/W			
	○ Ø 3' gray	27K, 30K, 35K, 40K	57 W	6830lm	74% down / 26% up	5050lm	1780lm	86 %	119lm/W
		27K, 30K, 35K, 40K	67 W	7100lm	80% down / 20% up	5250lm	1850lm		124lm/W
		27K, 30K, 35K, 40K	8110lm	6020lm	1780lm	117lm/W			
		27K, 30K, 35K, 40K	91 W	10130lm	80% down / 20% up	8040lm	2080lm		111lm/W
27K, 30K, 35K, 40K		10540lm	8360lm	2170lm	115lm/W				
27K, 30K, 35K, 40K		135 W	13790lm	80% down / 20% up	10980lm	2800lm	102lm/W		
27K, 30K, 35K, 40K		14350lm	11420lm	2910lm	106lm/W				

Accessory


SUSPENSION SET < 36 INCH

3-piece barrel mount set 6 9 8 - 0 9 8 - 0 5 1 4 0


FIXTURE DIMENSIONS

NOMINAL	DIMENSIONS	CODE
○ 1 1/2'	○ 17 3/4" / h 2 1/2"	DM - 1 . 5 F T
○ 2'	○ 23 5/8" / h 2 1/2"	DM - 2 F T
○ 3'	○ 35 7/16" / h 2 1/2"	DM - 3 F T


HEX 1'

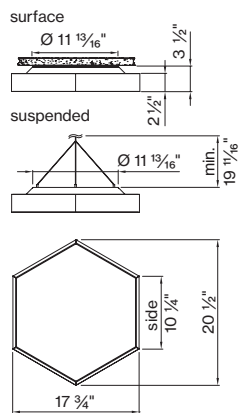

HEX 2'

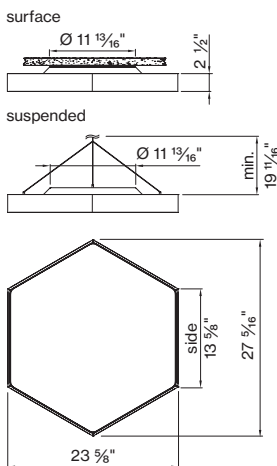

HEX 3'

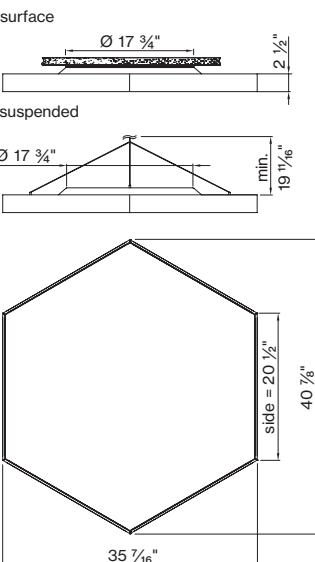

HEX mounting instructions

Get access to the HEX mounting instructions faster by scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/hexo-evo>

