

M-LINE LINEAR



CERTIFICATIONS & COMPLIANCE



FEATURES


5 YEAR
limited
led warranty

PERFORMANCE

- Magnetic inset attachment
- CRI > 90
- End to end capabilities
- 1:3 wall wash ratio

INSET TYPE


Wallwash



Grazer




Batwing



Opal




Wallwash



Opal Jut Out



MAGNETIC ATTACHMENT

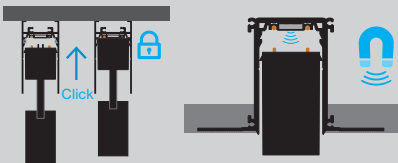

Catalog Number Example

MLINS-1.1-WALLW-27K-C90-010V-0350LF-2FT

A B C D E F G H

A RANGE

M-LINE inset MLINS

B TRACK TYPE

M-LINE 1.1 1.1
M-LINE 1.2 1.2

C INSET TYPE

Batwing BATWI
available for 1.1 only
Grazer GRAZE
available for 1.1 only
CS Opal jut-out OPALJ
available for 1.1 only
Opal flush OPALF
available for both 1.1 & 1.2
Wallwasher WALLW
available for both 1.1 & 1.2

D CCT

2700 K 27K
CS 3000 K 30K
CS 3500 K 35K
4000 K 40K

E CRI

CRI > 90 C90

F DIMMING

CS 0-10V 1% single control 010V
0-10V 1% dual control* DC10
*two 0-10V dimming outputs
wiring diagram is on power supply page

G OUTPUT LM/FT


350 lm/ft 0350LF
Wallwasher
CS 450 lm/ft 0450LF
Opal flush
500 lm/ft 0500LF
Batwing
510 lm/ft 0510LF
Grazer
530 lm/ft 0530LF
Opal jut-out

H DIMENSIONS IN FEET


1 foot 6 W 1FT
CS 2 feet 11 W 2FT
CS 4 feet 22 W 4FT
8 feet 44 W 8FT
opal flush only

Linear lenses


opal




opal jut-out




wallwasher



batwing



grazer regressed



M-LINE Mounting Instructions

Get access to the M-LINE mounting instructions faster by scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/m-line>



M-LINE MULTI SPOT



CERTIFICATIONS & COMPLIANCE



FEATURES

5 YEAR
limited
led warranty




PERFORMANCE


- Low glare
- Magnetic inset attachment
- CRI > 90
- Quiet illumination high output

INSET TYPE

Multispot



MAGNETIC ATTACHMENT

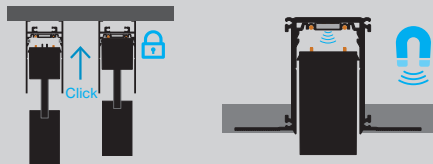

Catalog Number Example

MLINS-1.2MULTI-35K-C90-010V-0480LF-2FT

A B C D E F G

A RANGE

M-LINE inset MLINS

E DIMMING

CS 0-10V 1% single control 0 1 0 V
0-10V 1% dual control* DC 1 0

*two 0-10V dimming outputs

wiring diagram is on power supply page

B INSET TYPE

31° multi spot 1 . 2 MULTI

F OUTPUT LM/FT

480 lm/ft 0 4 8 0 L F
31° multi spot

C CCT

2700 K 2 7 K

CS 3000 K 3 0 K

CS 3500 K 3 5 K

4000 K 4 0 K

G DIMENSIONS IN FEET

CS 1 foot 7.2 W 1 F T


2 feet 14.4 W 2 F T

D CRI


CRI > 90 C 9 0

Linear lenses


opal







wallwasher



multi spot




Inset distances




INSET LENGTHS

NOMINAL L	DIMENSIONS
1'	12"
2'	23 13/16"
4'	47 7/16"
8'	94 11/16"

SIDE VIEW

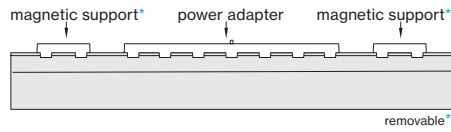

TOP VIEW

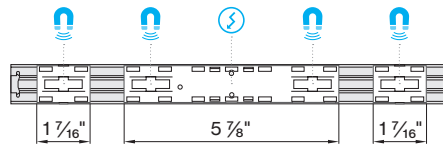

M-LINE Mounting Instructions

Get access to the M-LINE mounting instructions faster by scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/m-line>

