

M-LINE TUBE



CERTIFICATIONS & COMPLIANCE



FEATURES


5 YEAR
limited
led warranty

PERFORMANCE


- Magnetic inset attachment
- CRI > 90
- Safety catch locking

INSET TYPE


TUBE



ADDITIONAL FEATURES



attaches to M-LINE
track via magnets



freely movable

Catalog Number Example

MLINS-1.1TUBE-BL-35K-C90-010V-0590LF-3FT

A B C D E F G H

A RANGE

M-LINE inset MLINS

B INSET TYPE

TUBE 1.1 1.1TUBE
TUBE 1.2 1.2TUBE

C COLOR

Black BL
fine texture powder coated

D CCT

2700 K 27K
3000 K 30K
3500 K 35K
4000 K 40K

E CRI

CRI > 90 C90

F DIMMING

0-10V 1% single control 010V
0-10V 1% dual control* DC10
*two 0-10V dimming outputs
wiring diagram is on power supply page


G OUTPUT LM

590 lm/ft 100% \pm 0590LF

H DIMENSIONS IN FT

Linear 2' 10W 2FT
Linear 3' 15W 3FT
Linear 4' 20W 4FT

TUBE inset

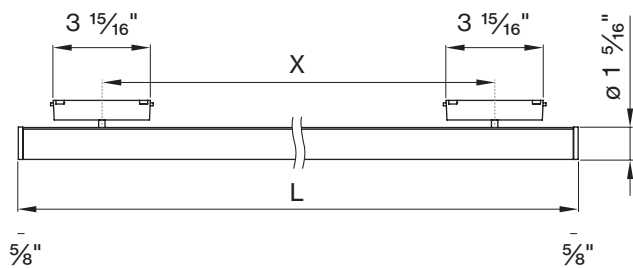

CHANNEL SPACING

L	x
2'	$18 \frac{3}{4}$ "
3'	$30 \frac{1}{2}$ "
4'	$42 \frac{1}{4}$ "

X = maximum on center channel spacing

**M-LINE
Mounting Instructions**

Get access to the M-LINE mounting instructions faster by scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/m-line>

