


# PANO 5.25"

WOODWORKS®

GRILLE TEGULAR 5/16" & 15/16" INTEGRATION

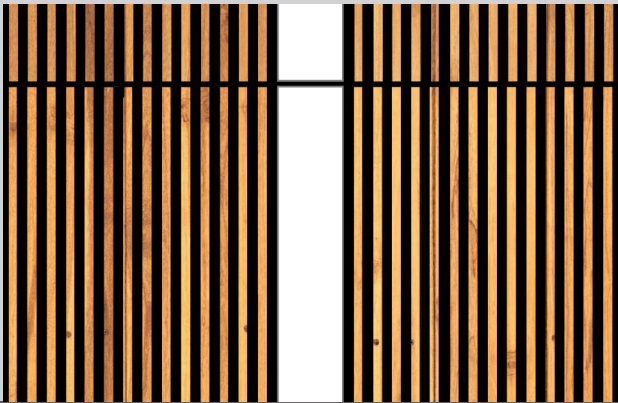

## CERTIFICATIONS & COMPLIANCE




## FEATURES

**5 YEAR**  
limited  
led warranty




## PERFORMANCE

- Coordinates with Woodworks® Grille Tegular & Integration ceiling panel
- Up to 124lm/W
- High performance opal cover
- Remote mountable LED Driver
- Damp rated



## WoodWorks® Grille Tegular Ceiling Integration

Grille Tegular Panel

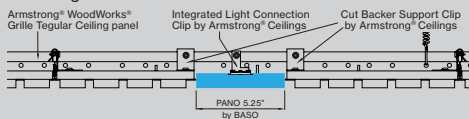

## REMOTE MOUNTING

Quick and easy electrical connection

REMOTE MOUNTING



## Catalog Number Example

PANO5-WT9-BL-PS-OP-27K-C80-UNV-DALI-0550LF-0ST-02FT

A B C D E F G H I J L M

### A RANGE

PANO 5.25" PANO 5

### I VOLTAGE

120V / 277V UNV

### B CEILING TYPE

WoodWorks® Grille WT 9  
Tegular 5/16"

WoodWorks® Grille WT 5  
Tegular 15/16"

please contact your Armstrong® ceilings rep for the Integrated Light Connection Clip for the specified ceiling type

### J DIMMING

0-10V 1% 0 1 0 V

Lutron EcoSystem L E S 1  
Quantum, Vive, GRAFIK Eye,  
HomeWorks

Power over ethernet P O E C

consult customer service for compatibility

Custom dimming X X X X

consult customer service for compatibility

### C COLOR

White WH

Black BL

### K OUTPUT LM/FT

550lm/ft 100% ↓ 0 5 5 0 L F

775lm/ft 100% ↓ 0 7 7 5 L F

1000lm/ft 100% ↓ 1 0 0 0 L F

### E POWER FEED LENGTH

4' standard integrated P S

10' medium remote option P M

30' long remote option P L

power feed distance denotes secondary wiring from detachable driver box to fixture; driver box comes with a 6 ft conduit for primary wiring

### K CIRCUIT / EM

Single circuit \*

\* leave blank

EMB EM battery pack EMB

emergency battery pack only for 120/ 277V option (90 minute emergency operation)

### F LENS

HP opal cover O P

### M SHAPE / PATTERN

Linear / straight S T

### G CCT

2700K 2 7 K

3000K 3 0 K

3500K 3 5 K

4000K 4 0 K

Custom CCT X X K

### N DIMENSIONS IN FT

2' fixture 0 2 F T

4' fixture 0 4 F T

fixture replaces full length of ceiling panel slats; please see table on next page and fixture length dimensions

### H CRI

CRI > 80 C 8 0

CRI > 90 C 9 0

BASO

basolighting.com

CS-V01

02/2025


**Technical data**

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LUMEN DIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
<b>PANO 5.25"</b> e LED	2' opal	40 K	10.4 W	1100lm	100% down	1100lm	69%	110lm/W
	4' opal		20.7 W	2200lm		2200lm		110lm/W
e <sup>2</sup> LED	2' opal	40 K	15 W	1550lm	100% down	1550lm	69%	106lm/W
	4' opal		30 W	3100lm		3100lm		106lm/W
e <sup>2+</sup> LED	2' opal	40 K	20.4 W	2000lm	100% down	2000lm	69%	98lm/W
	4' opal		40.8 W	4000lm		4000lm		98lm/W

for 27 K, 30K or 35 K multiply lm value by 0.96

**WoodWorks® Grille Tegular Ceiling Integration**

(for more ceiling options, please see CEILING OPTIONS pages)

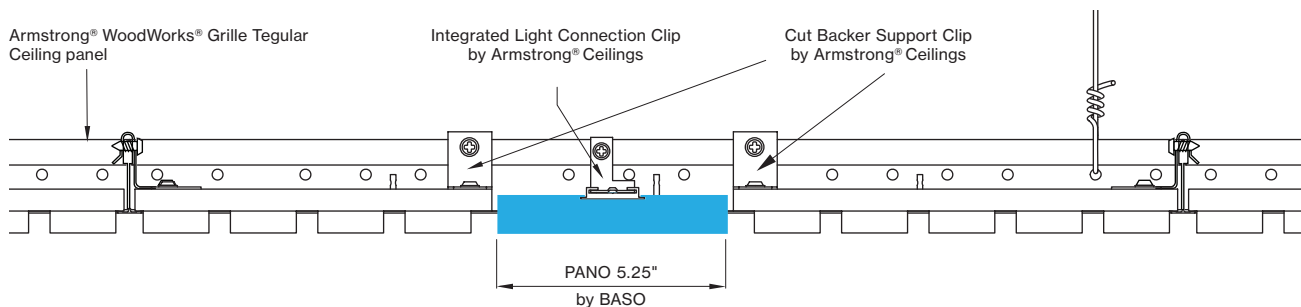

**Available lengths for ceiling types**

CEILING TYPE	2FT	4FT	6FT	8FT
WoodWorks® Grille Tegular 9/16	23.375"	47.375"	n/a	n/a
WoodWorks® Grille Tegular 15/16	23"	47"	n/a	n/a
WoodWorks® Grille Classic	23"	47"	71"	95"
WoodWorks® Grille Forte	*23"	47"	71"	95"
WoodWorks® Linear Solid Wood panels	*23"	*47"	*71"	95"
WoodWorks® Linear Veneered panels	*23"	*47"	*71"	95.25"

\*Woodworks ceilings are not available in this length. Wood panels need to be cut in the field to fit this length.

**INTEGRATED LIGHT CONNECTION CLIP**

Armstrong® Ceilings Integrated Light Connection Clip

visit [armstrongceilings.com/linearlighting](http://armstrongceilings.com/linearlighting)

please contact your Armstrong Ceilings rep

**WoodWorks® ceiling systems**





BASO PANO is only approved for Armstrong® WoodWorks Grille Tegular 9/16, WoodWorks Grille Tegular 15/16, WoodWorks Grille, WoodWorks Linear Solid Wood panels and WoodWorks Linear Veneered panels ceiling systems. Refer to [armstrongceilings.com](http://armstrongceilings.com) for installation instructions related to the ceiling products.

DIMENSIONS


PANO 5.25"

WT9 - ARMSTRONG® WOODWORKS® GRILLE TEGULAR 9/16 PANELS




WT9 view from below

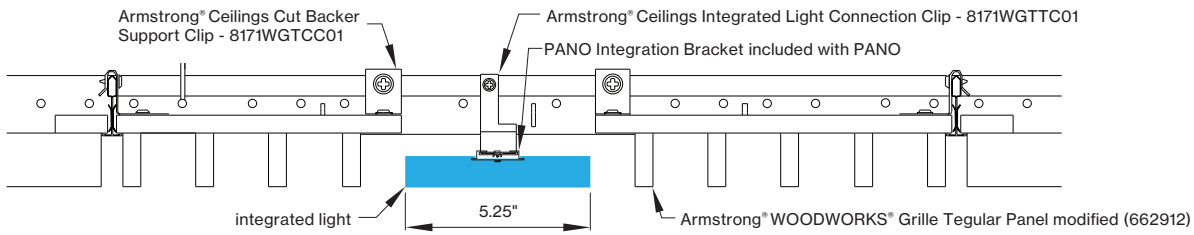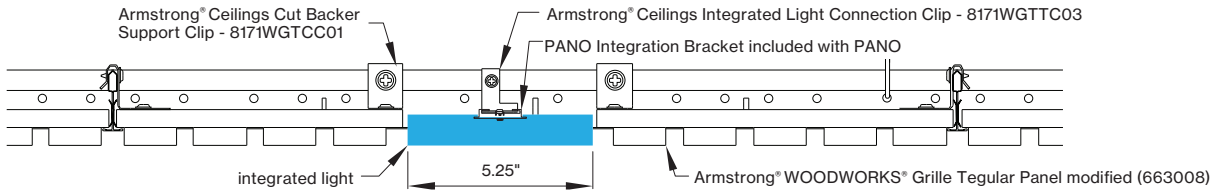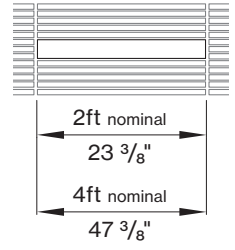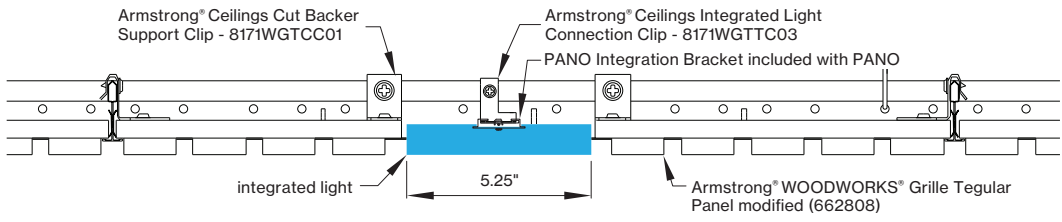

WT5 - ARMSTRONG® WOODWORKS® GRILLE TEGULAR 15/16 PANELS

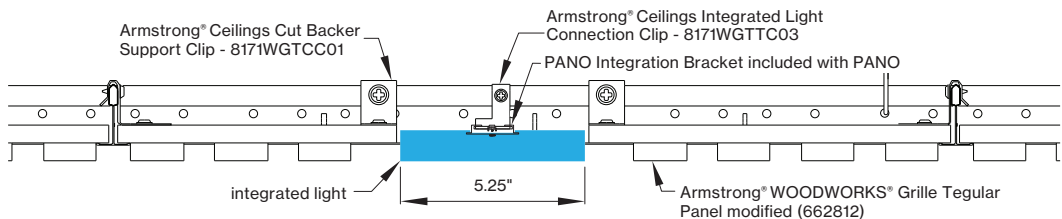

WT5 view from below

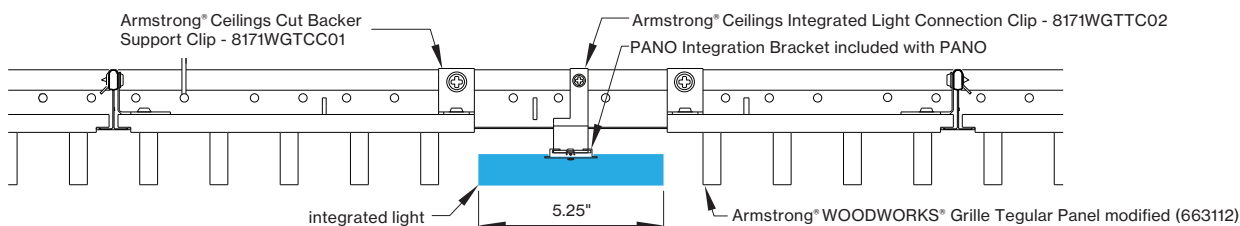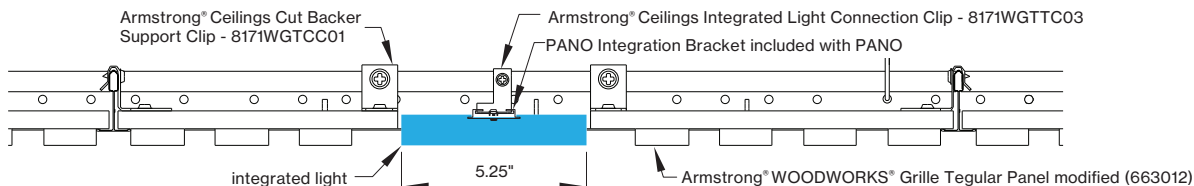

**PANO mounting instructions**

Get access to the PANO mounting instructions faster by scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/pano>

