


PANO 3.25"

WOODWORKS® GRILLE CLASSIC



CERTIFICATIONS & COMPLIANCE

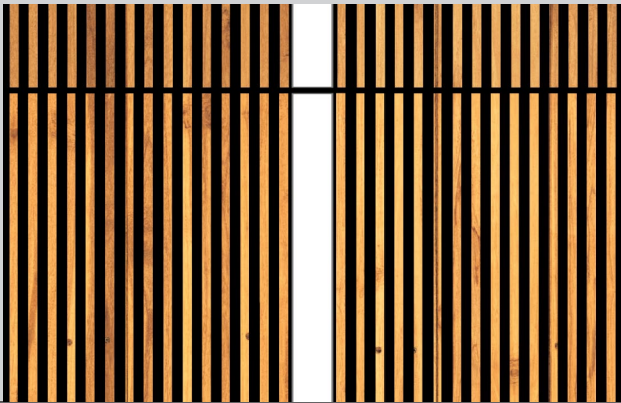


FEATURES

5 YEAR
limited
led warranty




PERFORMANCE

- Coordinates with Woodworks® Grille ceiling panel
- Up to 122lm/W
- High performance opal cover
- Remote mountable LED driver
- Damp rated



WoodWorks® Grille Ceiling Integration

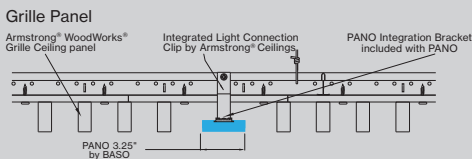

REMOTE MOUNTING

Quick and easy electrical connection

REMOTE MOUNTING



Catalog Number Example

PANO3-WWG-BL-PS-OP-27K-C80-UNV-010V-0450LF-ST-04FT

A B C D E F G H I J L M

A RANGE

PANO 3.25" PANO3

H VOLTAGE

120V / 277V UNV

B CEILING TYPE

WoodWorks® Grille WWG

please contact your Armstrong® ceilings rep for the Integrated Light Connection Clip for the specified ceiling type

I DIMMING

0-10V 1% 010V

Lutron EcoSystem LES1
Quantum, Vive, GRAFIK Eye, HomeWorks

Power over ethernet POEC

consult customer service for compatibility

Custom dimming XXXX

consult customer service for compatibility

C COLOR

White WH

Black BL

D POWER FEED LENGTH

4' standard integrated PS

10' medium remote option PM

30' long remote option PL

power feed distance denotes secondary wiring from detachable driver box to fixture; driver box comes with a 6ft conduit for primary wiring

J OUTPUT LM/FT

450lm/ft 100% ↓ 0450LF

675lm/ft 100% ↓ 0675LF

875lm/ft 100% ↓ 0875LF

K CIRCUIT / EM

Single circuit *

* leave blank

EMB EM battery pack EMB

emergency battery pack only for

120/ 277V option

(90 minute emergency operation)

E LENS

HP opal cover OP

F CCT

2700K 27K

3000K 30K

3500K 35K

4000K 40K

Custom CCT XXX

L SHAPE / PATTERN

Linear / straight ST

M DIMENSIONS IN FT

4' fixture 04FT

6' fixture 06FT

8' fixture 08FT

fixture replaces full length of ceiling panel; please see table on next page and fixture length dimensions


Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LUMEN DIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
PANO 3.25"								
e LED	8' opal	40K	29.5W	3600lm	100% down	3600lm	79%	122lm/W
e ² LED	8' opal	40K	44.7W	5400lm	100% down	5400lm	79%	121lm/W
e ²⁺ LED	8' opal	40K	58.9W	7000lm	100% down	7000lm	79%	119lm/W

for 27 K, 30 K or 35 K multiply lm value by 0.96

WoodWorks® Grille Ceiling Integration

(for more ceiling options, please see CEILING OPTIONS pages)

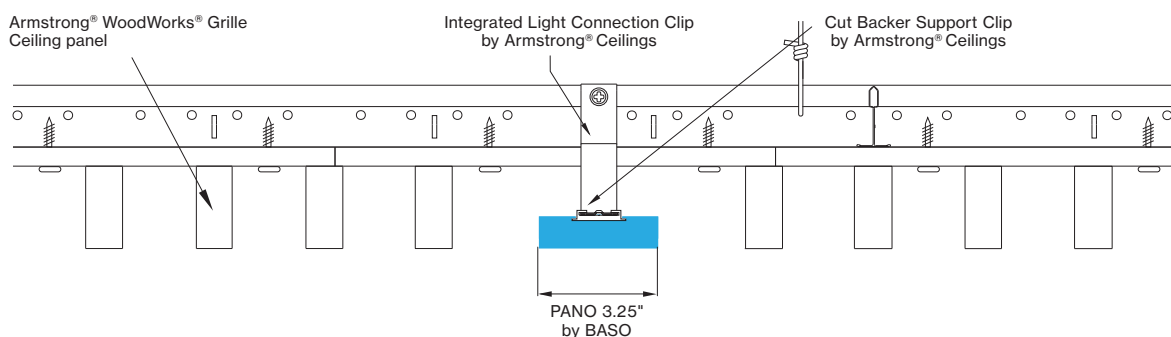

Available lengths for ceiling types

CEILING TYPE	2 FT	4 FT	6 FT	8 FT
WoodWorks® Grille Tegular 9/16	23.375"	47.375"	n/a	n/a
WoodWorks® Grille Tegular 15/16	23"	47"	n/a	n/a
WoodWorks® Grille Classic	23"	47"	71"	95"
WoodWorks® Grille Forte	*23"	47"	71"	95"
WoodWorks® Linear Solid Wood panels	*23"	*47"	*71"	95"
WoodWorks® Linear Veneered panels	*23"	*47"	*71"	95.25"

*Woodworks ceilings are not available in this length. Wood panels need to be cut in the field to fit this length.

INTEGRATED LIGHT CONNECTION CLIP

Armstrong® Ceilings Integrated Light Connection Clip

please contact your Armstrong Ceilings rep

visit armstrongceilings.com/linearlighting

WoodWorks® ceiling systems







BASO PANO is only approved for Armstrong® WoodWorks Grille Tegular 9/16, WoodWorks Grille Tegular 15/16, WoodWorks Grille, WoodWorks Linear Solid Wood panels and WoodWorks Linear Veneered panels ceiling systems. Refer to armstrongceilings.com for installation instructions related to the ceiling products.

DIMENSIONS



PANO 3.25"

WWG - ARMSTRONG® WOODWORKS® GRILLE PANELS

WWG view from below

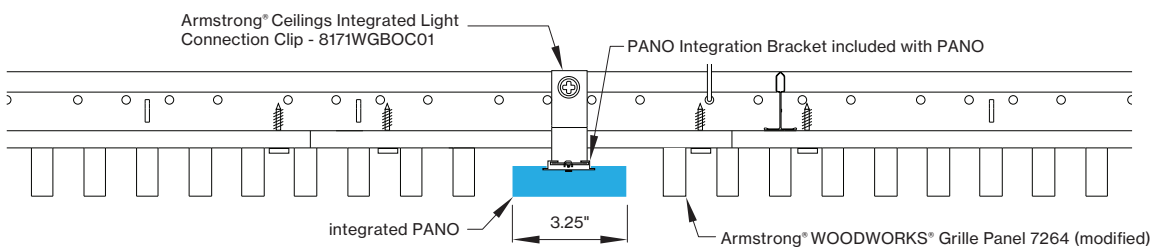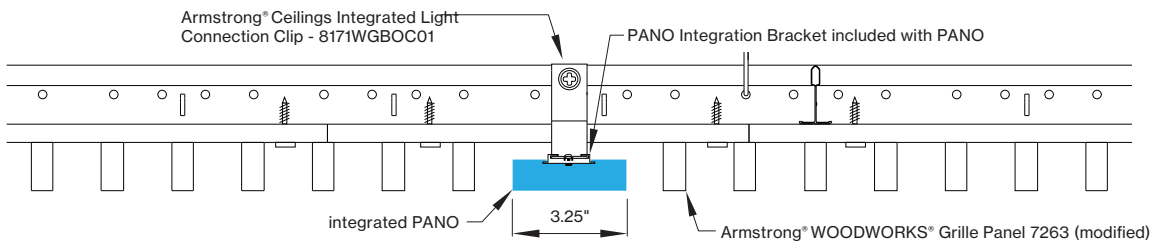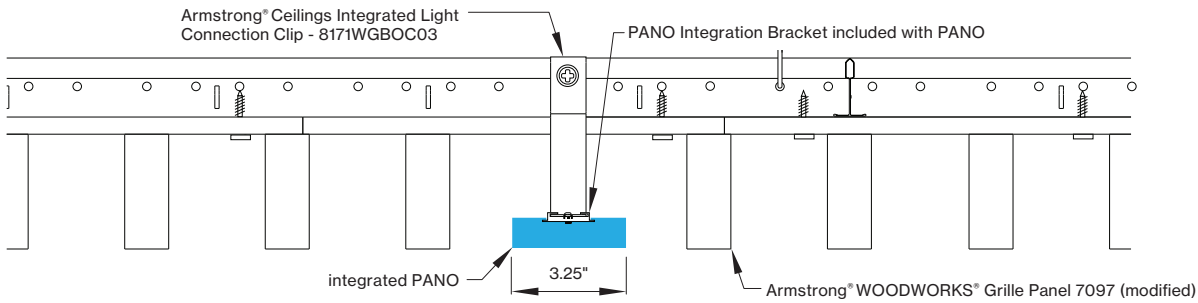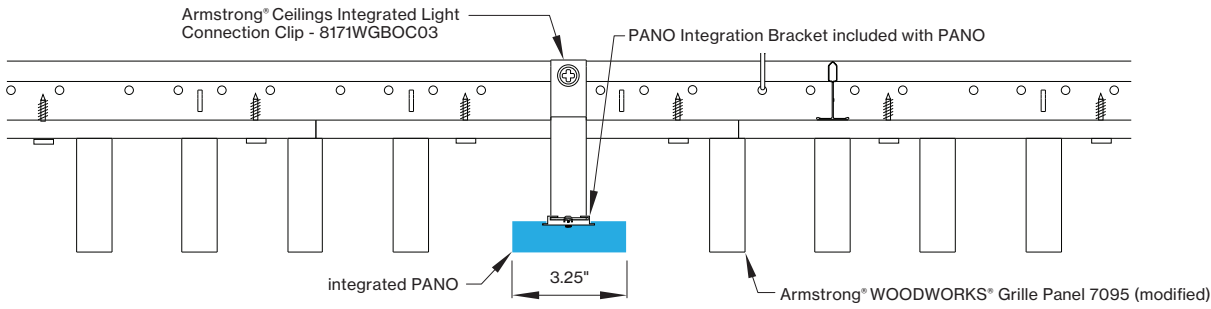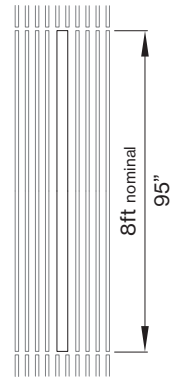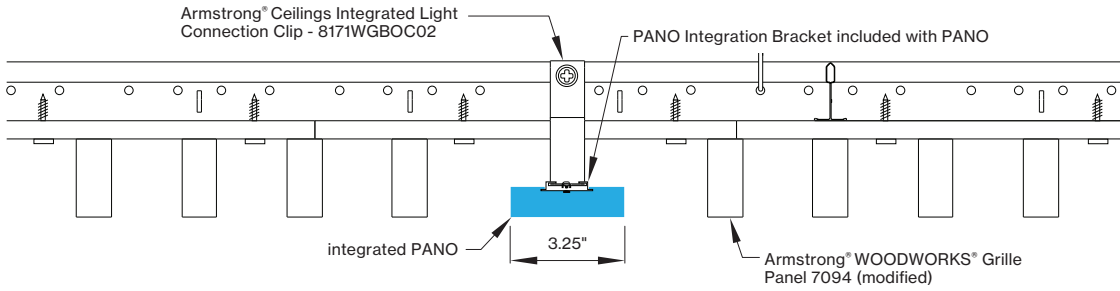

WWG - ARMSTRONG® WOODWORKS® GRILLE PANELS cont'd

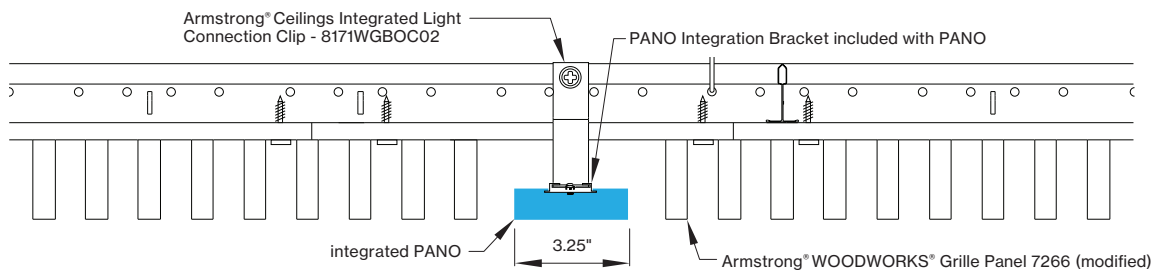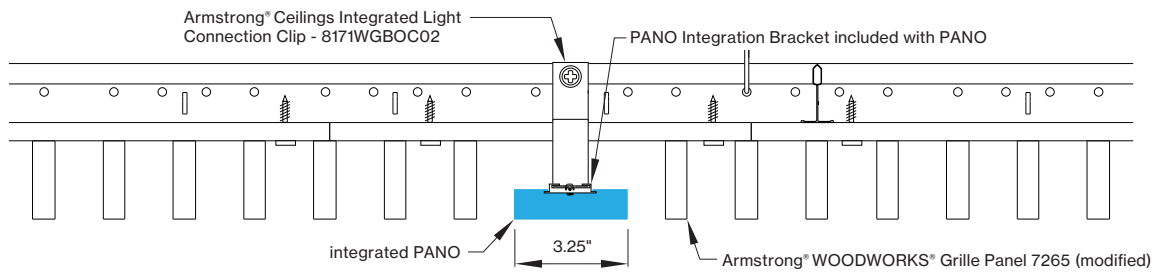

PANO mounting instructions

Get access to the PANO mounting instructions faster by scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/pano>

