


PANO 5.25"

WOODWORKS®

LINEAR SOLID & VENEERED WOOD PANELS

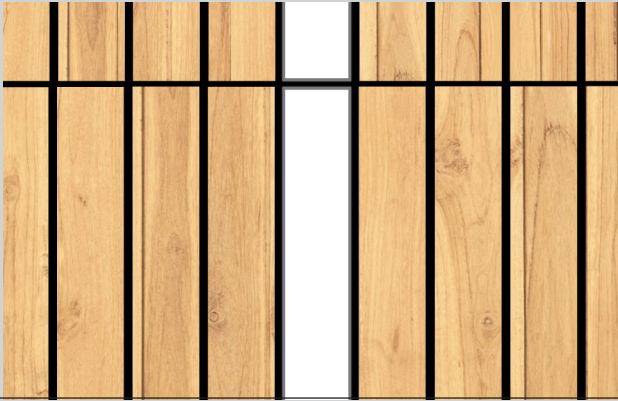

CERTIFICATIONS & COMPLIANCE




FEATURES

5 YEAR
limited
led warranty




PERFORMANCE

- Coordinates with Woodworks® Linear & Veneered ceiling panel
- Up to 124lm/W
- High performance opal cover
- Remote mountable LED driver
- Damp rated




WoodWorks® Grille Ceiling Integration

Linear Solid Wood Panel

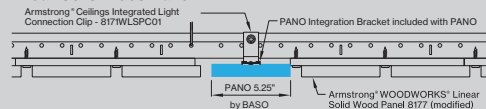

Linear Solid Wood Panel

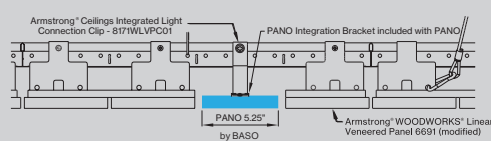

REMOTE MOUNTING

Quick and easy electrical connection

REMOTE MOUNTING



Catalog Number Example

PANO5-WLS-BL-PS-OP-27K-C80-UNV-010V-0550LF-ST-04FT

A B C D E F G H I J L M

A RANGE

PANO 5.25" PANO5

H VOLTAGE

120V / 277V UNV

B CEILING TYPE

WoodWorks® linear solid wood panels WLS
WoodWorks® linear veneered panels WL V

please contact your Armstrong® ceilings rep for the Integrated Light Connection Clip for the specified ceiling type

I DIMMING

0-10V 1% 010V
Lutron EcoSystem LES1
Quantum, Vive, GRAFIK Eye, HomeWorks

Power over ethernet POEC
consult customer service for compatibility
Custom dimming XXXX
consult customer service for compatibility

C COLOR

White WH
Black BL

J OUTPUT LM/FT

550 lm/ft 100% ↓ 0550LF
775 lm/ft 100% ↓ 0775LF
1000 lm/ft 100% ↓ 1000LF

D POWER FEED LENGTH

4' standard integrated PS
10' medium remote option PM
30' long remote option PL

power feed distance denotes secondary wiring from detachable driver box to fixture; driver box comes with a 6ft conduit for primary wiring

K CIRCUIT / EM

Single circuit *
* leave blank
EMB EM battery pack EMB
emergency battery pack only for 120/ 277V option (90 minute emergency operation)

E LENS

HP opal cover OP

L SHAPE / PATTERN

Linear / straight ST

F CCT

2700K 27K
3000K 30K
3500K 35K
4000K 40K
Custom CCT XXX

M DIMENSIONS IN FT

4' fixture 04FT
6' fixture 06FT
8' fixture 08FT

fixture replaces full length of ceiling panel; please see table on next page and fixture length dimensions

G CRI

CRI > 80 C80
CRI > 90 C90

BASO

basolighting.com

CS-V01

02/2025


Technical data

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LUMEN DIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
PANO 5.25"								
e LED	8' opal	40 K	35.4 W	4400 lm	100% down	4400 lm	81%	110 lm/W
e ² LED	8' opal	40 K	50.5 W	6200 lm	100% down	6200 lm	81%	106 lm/W
e ²⁺ LED	8' opal	40 K	67.3 W	8000 lm	100% down	8000 lm	81%	98 lm/W

for 27 K, 30 K or 35 K multiply lm value by 0.96

WoodWorks® Grille Ceiling System Integration

(for more ceiling options, please see CEILING OPTIONS pages)

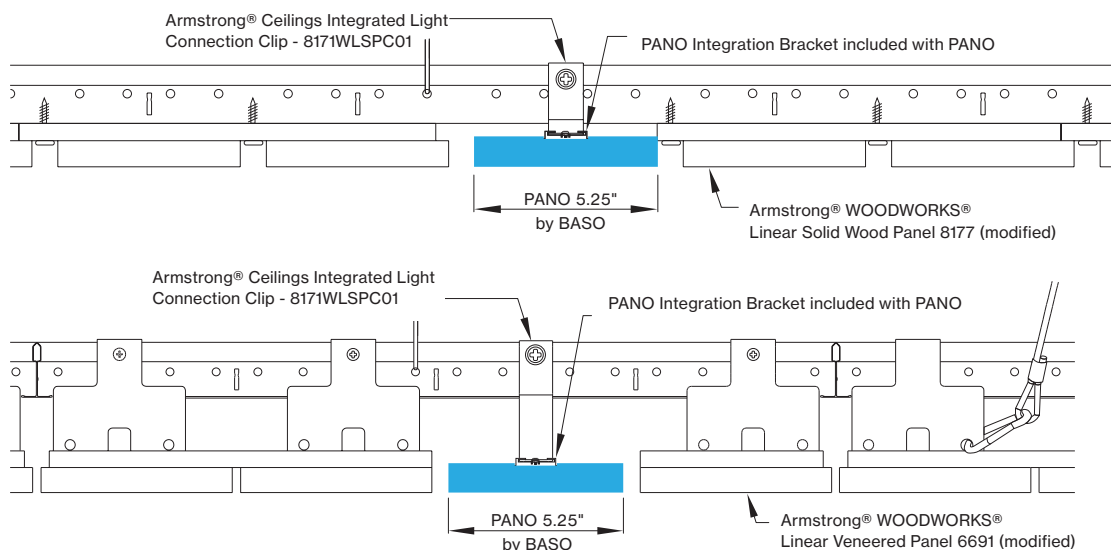

Available lengths for ceiling types

CEILING TYPE	2 FT	4 FT	6 FT	8 FT
WoodWorks® Grille Tegular 9/16	23.375"	47.375"	n/a	n/a
WoodWorks® Grille Tegular 15/16	23"	47"	n/a	n/a
WoodWorks® Grille Classic	23"	47"	71"	95"
WoodWorks® Grille Forte	*23"	47"	71"	95"
WoodWorks® Linear Solid Wood panels	*23"	*47"	*71"	95"
WoodWorks® Linear Veneered panels	*23"	*47"	*71"	95.25"

*Woodworks ceilings are not available in this length. Wood panels need to be cut in the field to fit this length.

INTEGRATED LIGHT CONNECTION CLIP

Armstrong® Ceilings Integrated Light Connection Clip

visit armstrongceilings.com/linearlighting


please contact your Armstrong Ceilings rep

WoodWorks® ceiling systems


BASO PANO is only approved for Armstrong® WoodWorks Grille Tegular 9/16, WoodWorks Grille Tegular 15/16, WoodWorks Grille, WoodWorks Linear Solid Wood panels and WoodWorks Linear Veneered panels ceiling systems. Refer to armstrongceilings.com for installation instructions related to the ceiling products.

DIMENSIONS


WLS - ARMSTRONG® WOODWORKS® LINEAR SOLID WOOD PANELS

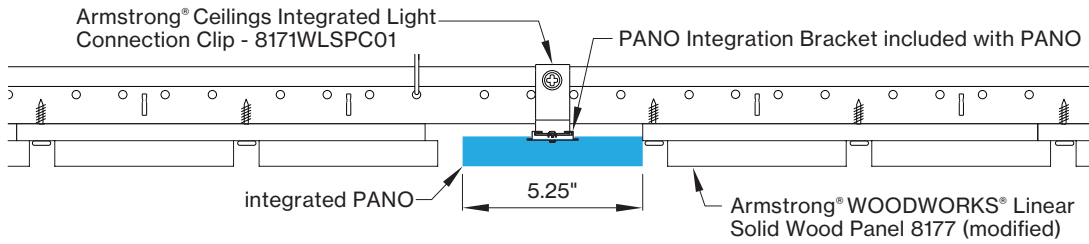


WLS view from below

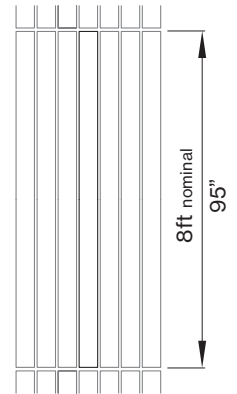

WLV - ARMSTRONG® WOODWORKS® LINEAR VENEERED PANELS

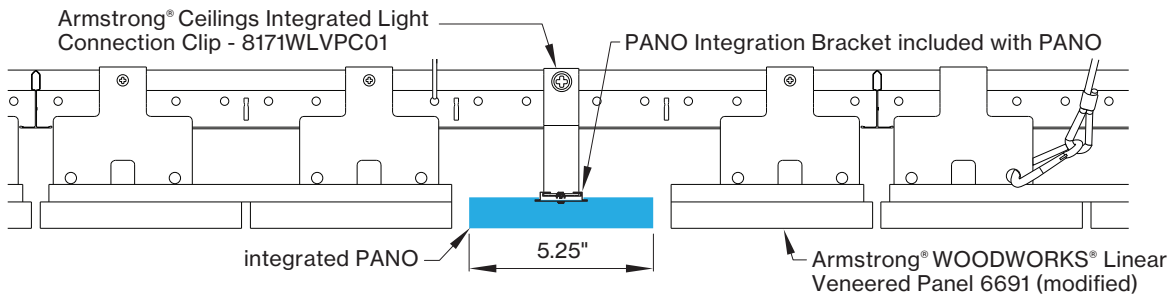

WLV view from below

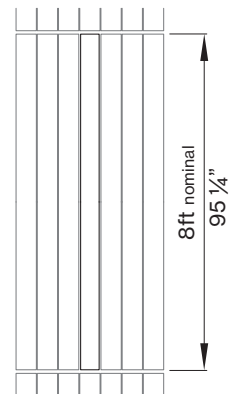

PANO mounting instructions

Get access to the PANO mounting instructions faster by scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/pano>

