

# PANO 3.25"

## WOODWORKS®

LINEAR SOLID & VENEERED WOOD PANELS



### CERTIFICATIONS & COMPLIANCE




### FEATURES

**5 YEAR**  
limited  
led warranty




### PERFORMANCE

- Coordinates with Woodworks® Linear & Veneered ceiling panel
- Up to 122lm/W
- High performance opal cover
- Remote mountable LED driver
- Damp rated




### WoodWorks® Grille Ceiling Integration

#### Linear Solid Wood Panel



#### Linear Veneered Panel

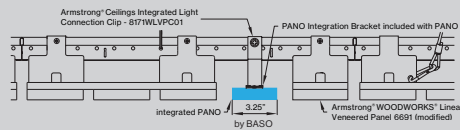

### REMOTE MOUNTING

Quick and easy electrical connection



### Catalog Number Example

PANO3-WLV-BL-PS-OP-27K-C80-UNV-010V-0875LF-ST-04FT

A B C D E F G H I J L M

### A RANGE

PANO 3.25" PANO3

### H VOLTAGE

120V / 277V UNV

### B CEILING TYPE

WoodWorks® linear WLS  
solid wood panels

WoodWorks® linear WL V  
veneered panels

please contact your Armstrong® ceilings rep for the Integrated Light Connection Clip for the specified ceiling type

### I DIMMING

0-10V 1% 010V

Lutron EcoSystem LES 1

Quantum, Vive, GRAFIK Eye, HomeWorks

Power over ethernet POEC

consult customer service for compatibility

Custom dimming XXXX

consult customer service for compatibility

### C COLOR

White WH

Black BL

### J OUTPUT LM/FT

450lm/ft 100% † 0450LF

675lm/ft 100% † 0675LF

875lm/ft 100% † 0875LF

### D POWER FEED LENGTH

4' standard integrated PS

10' medium remote option PM

30' long remote option PL

power feed distance denotes secondary wiring from detachable driver box to fixture; driver box comes with a 6ft conduit for primary wiring

### K CIRCUIT / EM

Single circuit \*

\* leave blank

EMB EM battery pack EMB

emergency battery pack only for 120/ 277V option

(90 minute emergency operation)

### E LENS

HP opal cover OP

### L SHAPE / PATTERN

Linear / straight ST

### F CCT

2700K 27K

3000K 30K

3500K 35K

4000K 40K

Custom CCT XXXX

### M DIMENSIONS IN FT

4' fixture 04FT

6' fixture 06FT

8' fixture 08FT

fixture replaces full length of ceiling panel; please see table on next page and fixture length dimensions

### G CRI

CRI > 80 C80

CRI > 90 C90

BASO

basolighting.com

CS-V01

02/2025



**Technical data**

	SIZE TYPE	LED COLOR TEMPERATURE	INPUT WATTS	DELIVERED LM TOTAL	LIGHT DISTRIBUTION	DELIVERED LUMEN DIRECT	OPTICAL EFFICIENCY	LUMINAIRE EFFICACY
<b>PANO 3.25"</b>								
e LED	8' opal	40K	29.5 W	3600 lm	100% down	3600 lm	79%	122 lm/W
e <sup>2</sup> LED	8' opal	40K	44.7 W	5400 lm	100% down	5400 lm	79%	121 lm/W
e <sup>2+</sup> LED	8' opal	40K	58.9 W	7000 lm	100% down	7000 lm	79%	119 lm/W

for 27 K, 30 K or 35 K multiply lm value by 0.96

**WoodWorks® Grille Ceiling System Integration**

(for more ceiling options, please see CEILING OPTIONS pages)

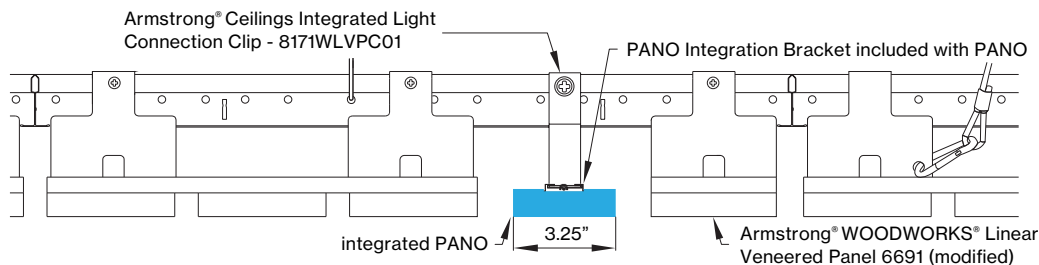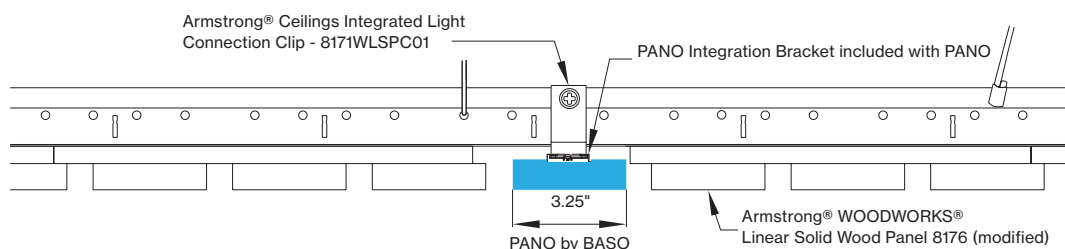

**Available lengths for ceiling types**

CEILING TYPE	2 FT	4 FT	6 FT	8 FT
WoodWorks® Grille Tegular 9/16	23.375"	47.375"	n/a	n/a
WoodWorks® Grille Tegular 15/16	23"	47"	n/a	n/a
WoodWorks® Grille Classic	23"	47"	71"	95"
WoodWorks® Grille Forte	*23"	47"	71"	95"
WoodWorks® Linear Solid Wood panels	*23"	*47"	*71"	95"
WoodWorks® Linear Veneered panels	*23"	*47"	*71"	95.25"

\*Woodworks ceilings are not available in this length. Wood panels need to be cut in the field to fit this length.


**WoodWorks® ceiling systems**

BASO PANO is only approved for Armstrong® WoodWorks Grille Tegular 9/16, WoodWorks Grille Tegular 15/16, WoodWorks Grille, WoodWorks Linear Solid Wood panels and WoodWorks Linear Veneered panels ceiling systems. Refer to armstrongceilings.com for installation instructions related to the ceiling products.


DIMENSIONS

**PANO 3.25"**


**WLS - ARMSTRONG® WOODWORKS® LINEAR SOLID WOOD PANELS**

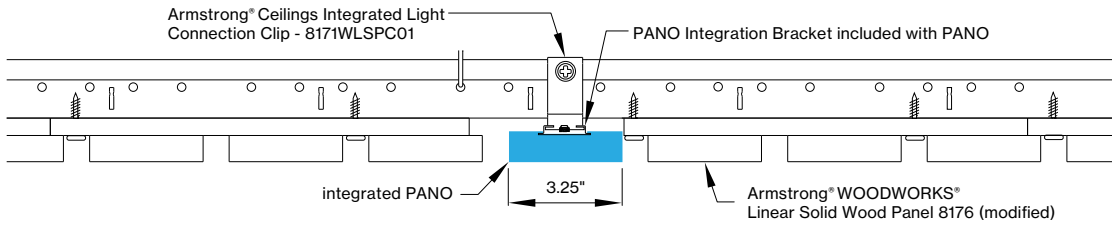

WLS view from below

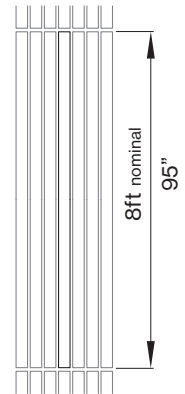

**WLV - ARMSTRONG® WOODWORKS® LINEAR VENEERED PANELS**

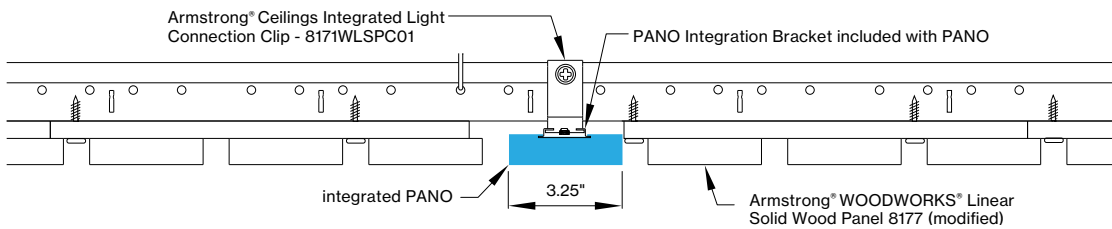

WLV view from below



**PANO mounting instructions**

Get access to the PANO mounting instructions faster by scanning the QR code.

<https://www.basolighting.com/resources/mounting-instructions/pano>

