

R-LINE[®]

CURVE



CERTIFICATIONS & COMPLIANCE




FEATURES

5 YEAR
limited
led warranty

CONFIGURATIONS




R1 Track
1" Inset



R2 Track
1" Inset



R2 Track
2" Inset



R3 Track
1" Inset

COLORS



Black



White

Catalog Number Example

RLINS-OPAL-1-BL-27K-C90-48V-010V-300LF-3F-R36A90

A B C D E F G I J

A SYSTEM

R-LINE R L I N S

B PRODUCT

Curve Opal O P A L

C INSET HEIGHT

1" flush with R1/R3 Track 1
2" Inset coming soon 2

D ADAPTER COLOR

Black B L
White W H
recommendation: adapter & track color should match

E CCT/CRI

2700K /CRI>90 2 7 K - C 9 0
3000K /CRI>90 3 0 K - C 9 0
3500K /CRI>90 3 5 K - C 9 0
4000K /CRI >90 4 0 K - C 9 0

F VOLTAGE

48V low constant voltage 4 8 V
remote driver required (see driver cutsheet)

G DIMMING

0-10V 1% dimming 0 1 0 V

H CIRCUIT

1 or 2 Circuit *
compatible with 1 or 2 track(see driver wiring diagram)
*leave empty

I OUTPUT

300 lm/ft. 3W/ft. 3 0 0 L F - 3W F
700 lm/ft. 7W/ft. 7 0 0 L F - 7W F

J DIMENSION

Radius 18"/90° R 1 8 A 9 0
Radius 24"/90° R 2 4 A 9 0
Radius 36"/90° R 3 6 A 9 0

Optional Accessories

ships seperately

OPTIONAL

Inset with Power Connector P C
Inset with Power Feed P F

Other Options

+ LOUVER

see R-Line Louver cutsheet


+ CURVE OPAL

see R-Line Curve Opal cutsheet

+ SPOT CURVE OPAL

see R-Line Spot cutsheet

DIMENSIONS

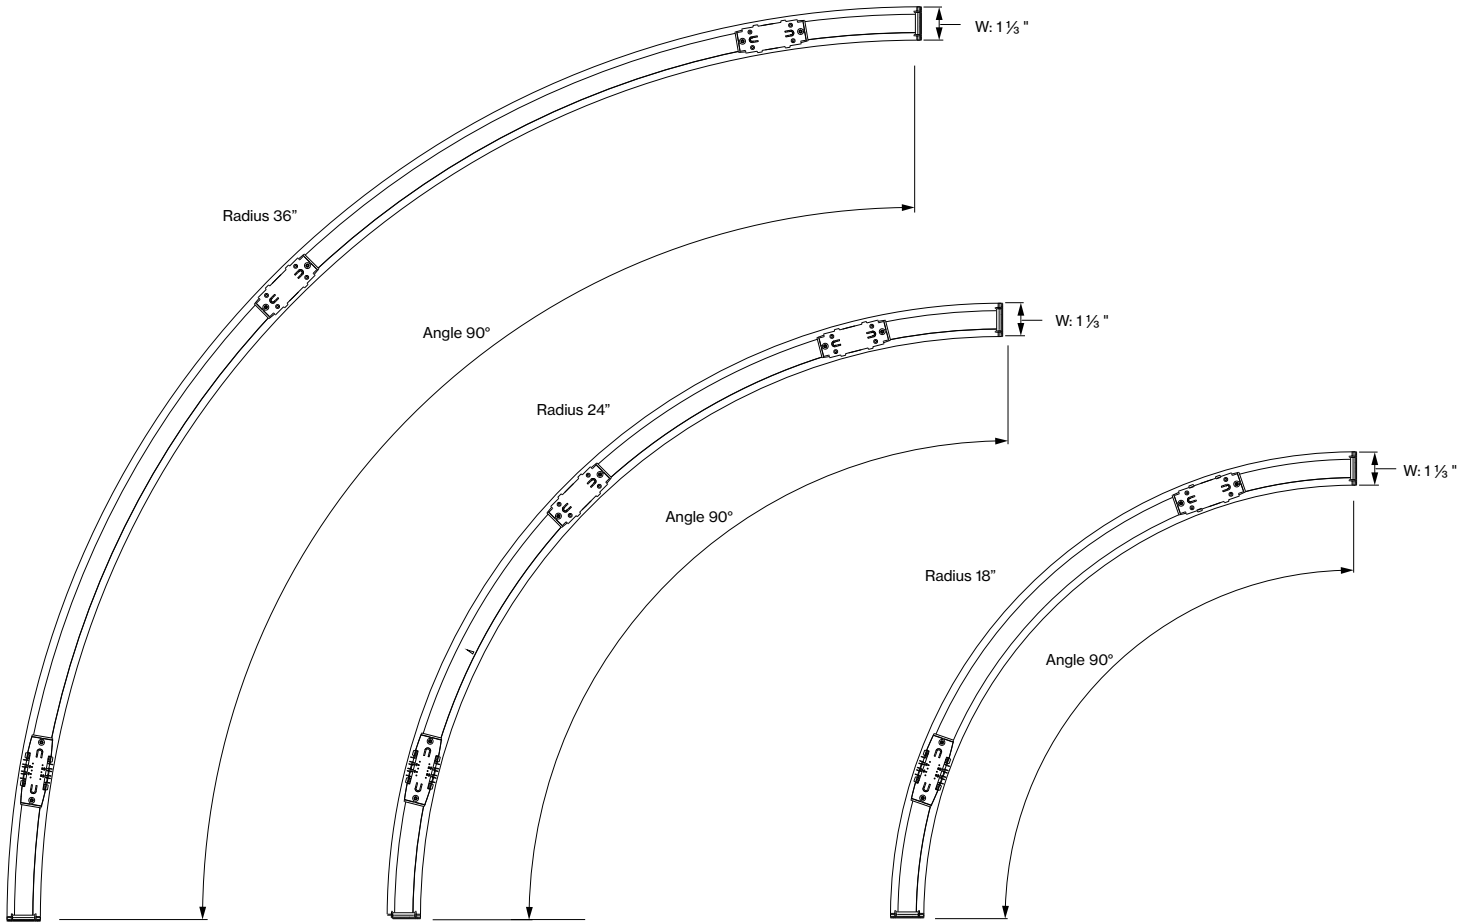

Catalog ID	Dimensions	Output	Wattage
R18A45	Radius 18"/45°	300lm/ft	4W/inset
R18A90	Radius 18"/90°	300lm/ft	8W/inset
R24A45	Radius 24"/45°	300lm/ft	5W/inset
R24A90	Radius 24"/90°	300lm/ft	9W/inset
R36A45	Radius 36"/45°	300lm/ft	8W/inset
R36A90	Radius 36"/90°	300lm/ft	15W/inset
R18A45	Radius 18"/45°	700lm/ft	9W/inset
R18A90	Radius 18"/90°	700lm/ft	18W/inset
R24A45	Radius 24"/45°	700lm/ft	11W/inset
R24A90	Radius 24"/90°	700lm/ft	21W/inset
R36A45	Radius 36"/45°	700lm/ft	18W/inset
R36A90	Radius 36"/90°	700lm/ft	35W/inset

Declare.

R-LINE OPAL LINEAR/CURVE
BASO Inc.

Final Assembly: Oxford, Connecticut, USA
 Life Expectancy: 7 Years(s)
 End of Life Options: Recyclable (80%), Landfill (20%)

Ingredients:
 Polymethyl methacrylate; Small electrical components¹; Copper; Steel manufacture, chemicals

¹LBC Temp Exception RL-002 - Small Electrical Components

Living Building Challenge Criteria: Compliant

I-13 Red List:
 LBC Red List Free % Disclosed: 100% at 100ppm
 LBC Red List Approved VOC Content: Not Applicable
 Declared

I-10 Interior Performance: Not Applicable
I-14 Responsible Sourcing: Not Applicable

BAS-0006
 EXP. 01 AUG 2025
 Original Issue Date: 2024

MEMBER OF THE RESPONSIBLE SOURCE INITIATIVE™
 INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare