


R-LINE®

HEX



CERTIFICATIONS & COMPLIANCE



FEATURES



5 YEAR
limited
led warranty

PERFORMANCE

- Decorative pendant shapes
- CRI > 90

INSET TYPE

HEX

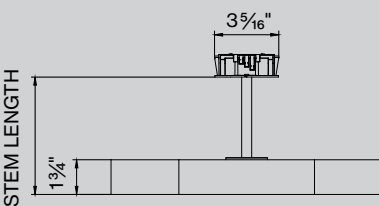

Catalog Number Example

RLINS-HEX-BLBL-30K-C90-48V-010V-1000LM-10W-DM-1FT-STM-6IN

A B C D E F G I J K

A SYSTEM

R-LINE R L I N S

B PRODUCT

HEX H E X

C COLOR HOUSING

Black RAL9005 B L _ _
White RAL9016 W H _ _

ADAPTER & STEM COLOR sub option

Black B L
White W H

recommendation: adapter & track color should match

D CCT

2700K 2 7 K
3000K 3 0 K
3500K 3 5 K
4000K 4 0 K

E CRI

CRI > 90 C 9 0

F VOLTAGE

48V low constant voltage 4 8 V
remote driver required (see driver cutsheet)

G DIMMING

0-10V 1% dimming 0 1 0 V

H CIRCUIT

1 or 2 Circuit *
compatible with 1 or 2 track (see driver cutsheet)
*leave blank

I OUTPUT

500 lm 5w 5 0 0 LM - 5 W
1000 lm 10w 1 0 0 0 LM - 1 0 W

J SIZE

1" diameter D M - 1 F T

K STEM LENGTH*

6" stem S T M - 6 I N
96" stem S T M - 9 6 I N
Custom Stem X X X I N

*Stem lengths available in 6" increments from 6" to 96".
Stems are not field-cuttable.

L ADAPTER COVER

ship standard with straight cover (field
changeable)

Curved R18" R 1 8
Curved R24" R 2 4
Curved R36" R 3 6
Straight S T R

DIMENSIONS

HEX

